
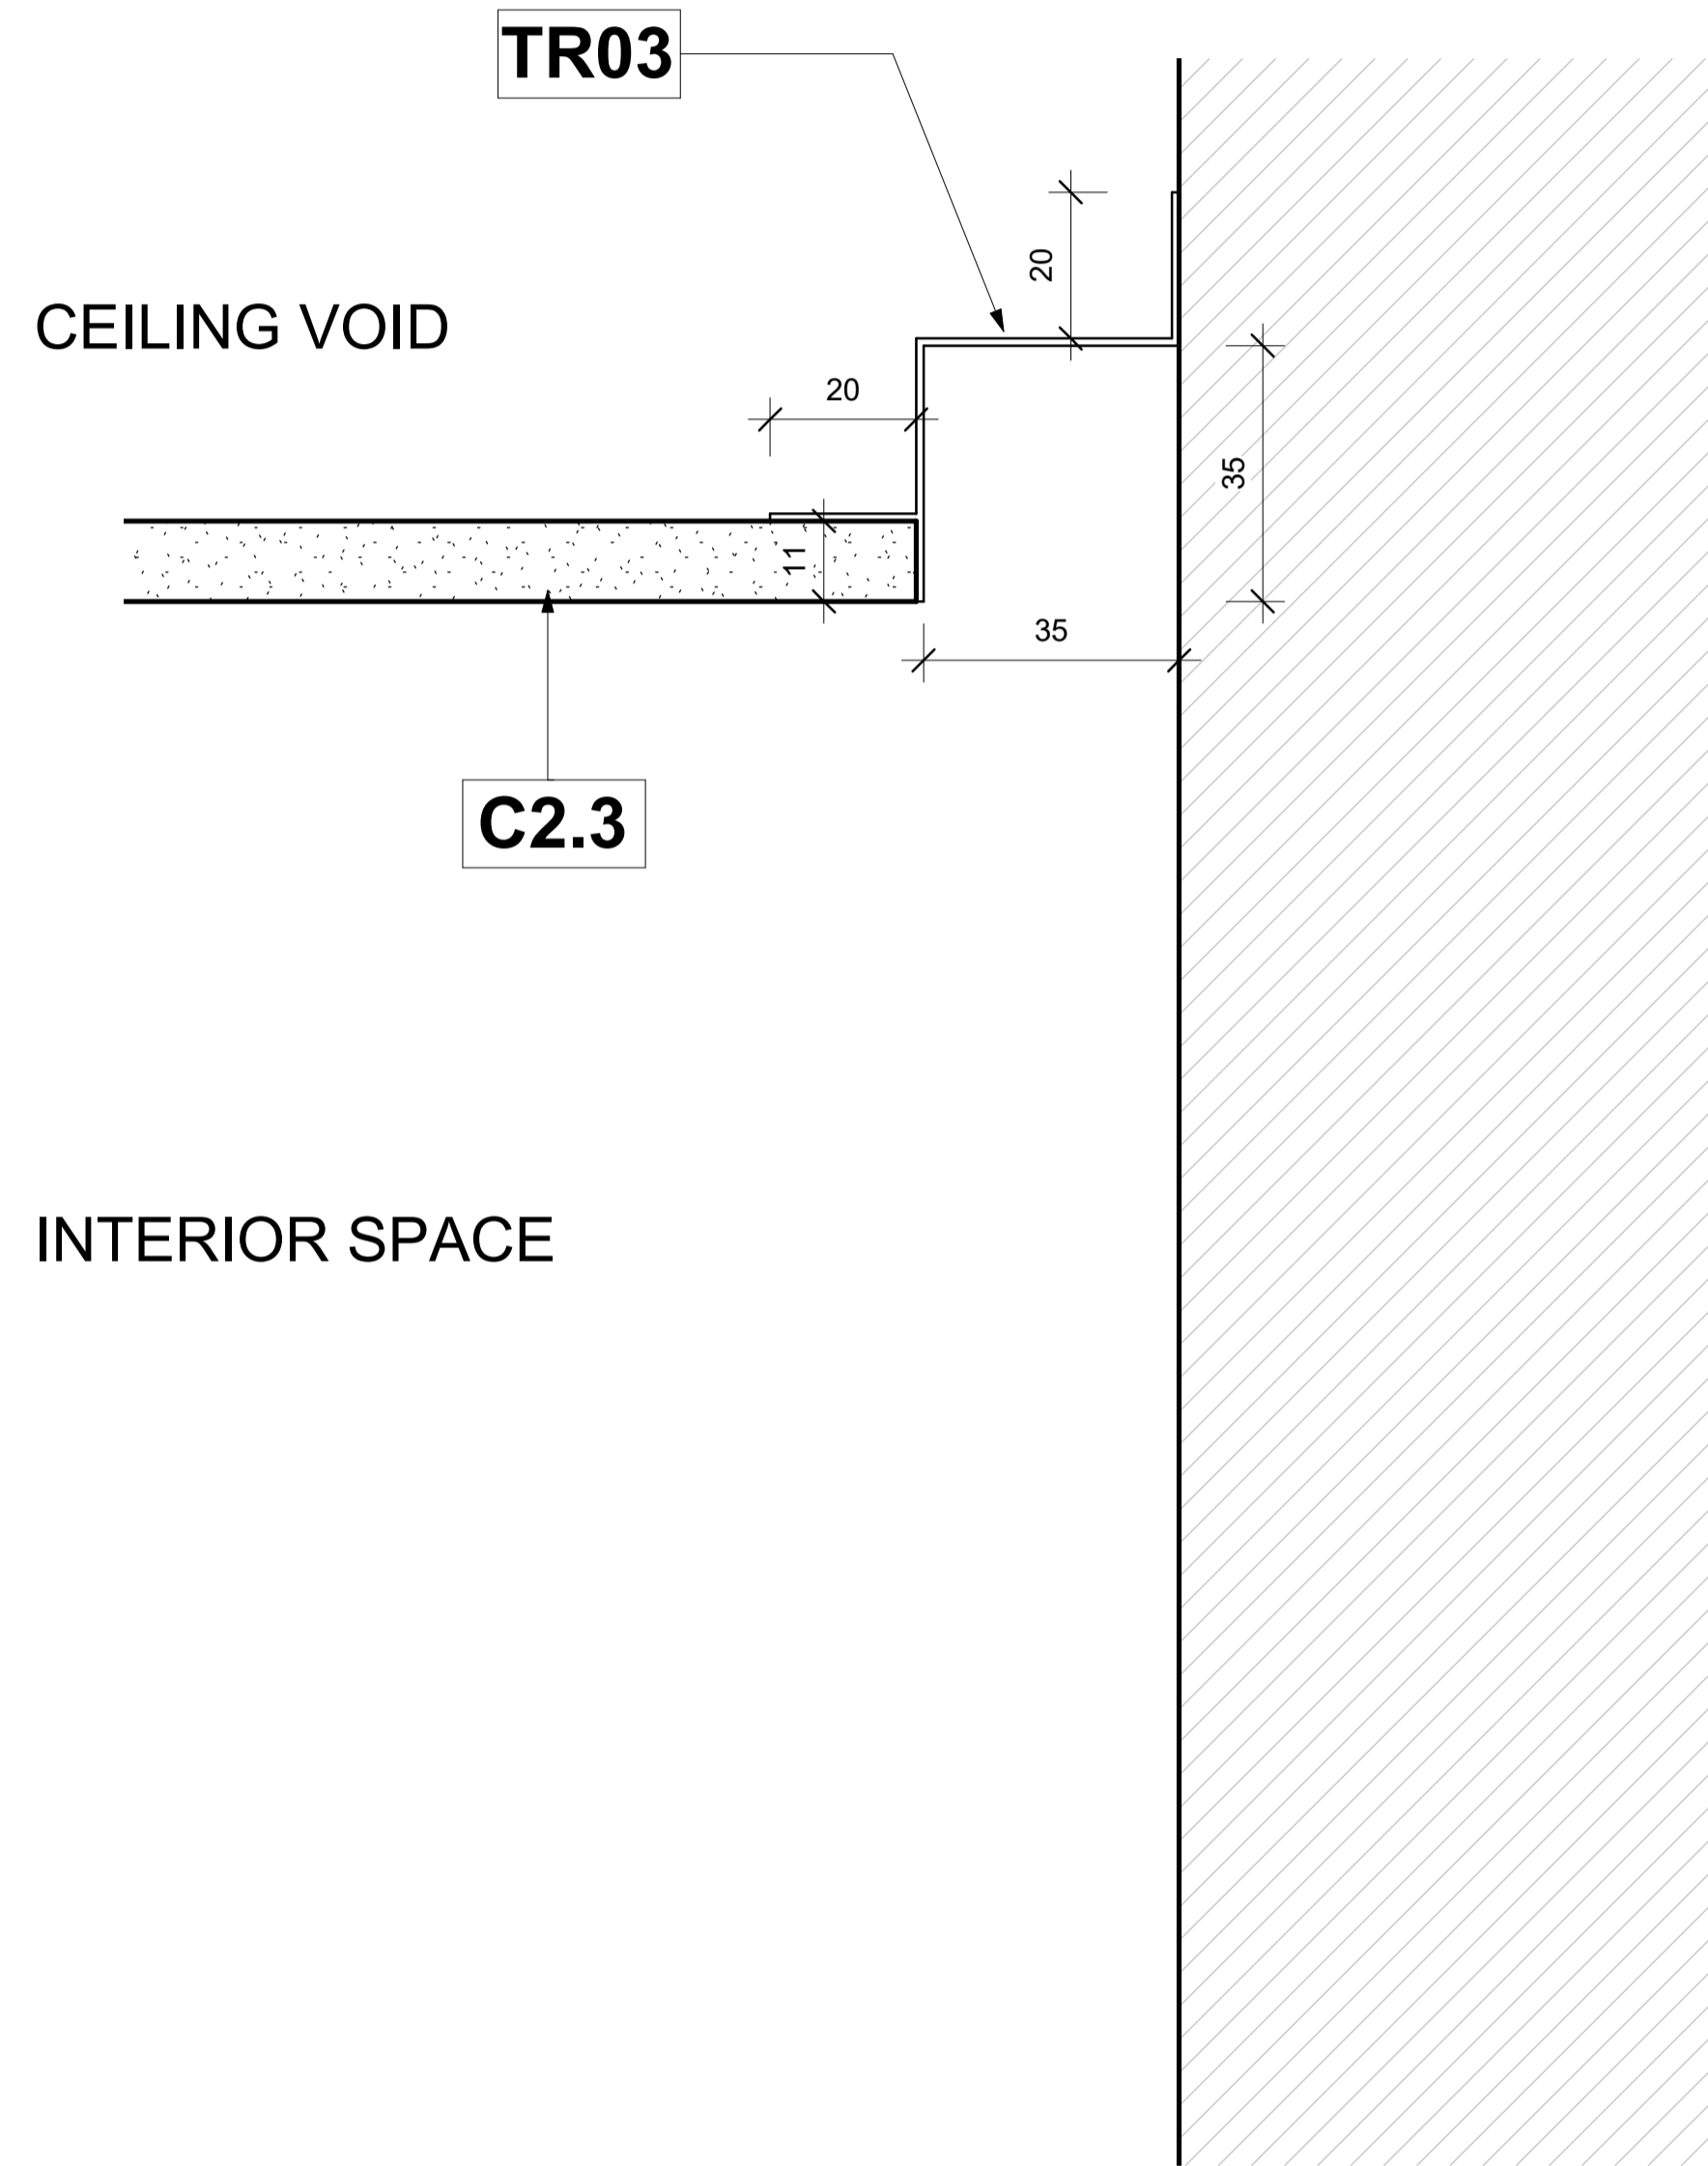


Ceiling Trims - PS35 Plaster Trim 35 x 35

Keynote Legend	
Key Value	Keynote Text
C2.3	Supply and install 3600mm JUMBO Main Tees at 1200mm centres in one direction and 1200mm JUMBO Cross Tees at 600mm centres perpendicular to Main Tees. Main Tees to be suspended at 1200mm centres by means of 25 x 25 x 0.6mm galvanised steel angle, hangers fixed to bulb of Main Tee with wafer tek screws/steel pop rivets and to slab with 6 x 30mm express nails and washers.
TR03	PS35 Plaster Trim 35 x 35. Supply and install Pelican PS35 Shadowline pre-drilled & pre-painted aluminium white Shadowline Wall Trim to perimeter of rooms fixed at 450mm centres with wall anchors.

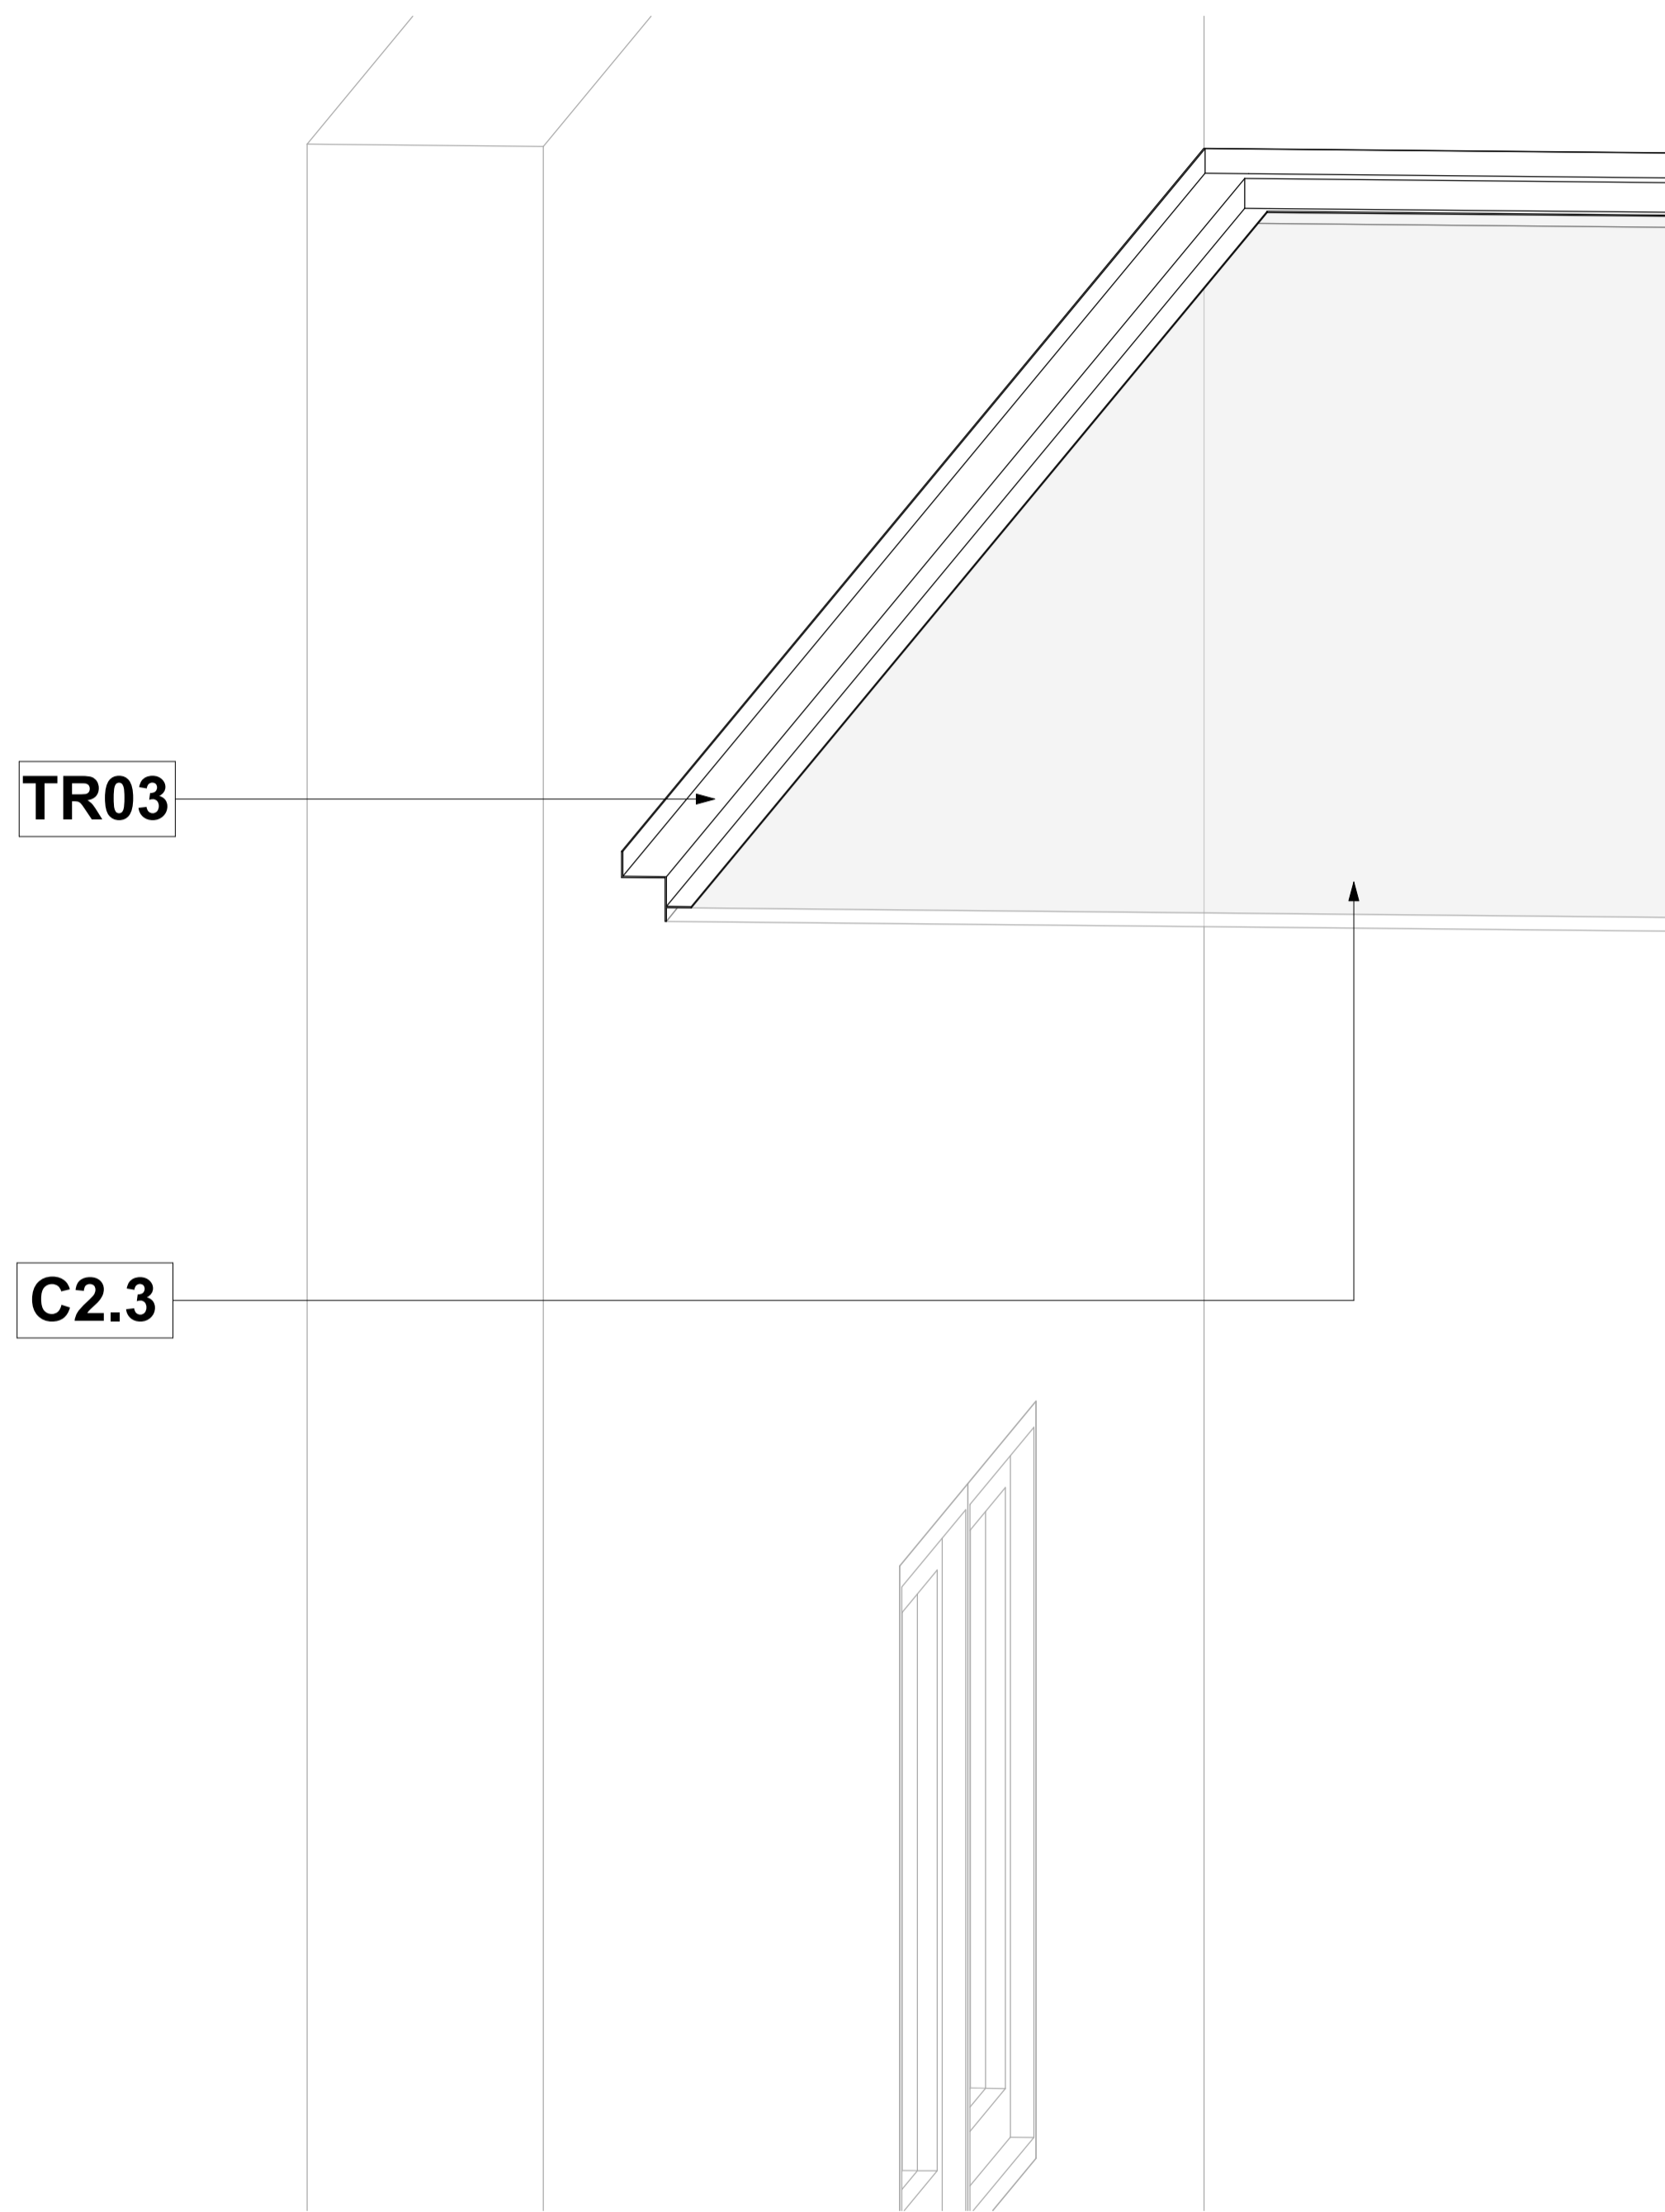

TR03 - PS35 Plaster Trim 35 x 35	
System	Ceiling Trims
Type of Product	PS35 Plaster Trim 35mm x 35mm
Recommended Areas	Ceiling Perimeter
Technical Spec	PS35 (35 x 35) Aluminium used with JUMBO Board
Material	Aluminium
Picture	
Size and Thickness	35mm x 35mm
Colour Options	White
Building material information	N/A
Fire Protection	N/A
Sound absorption	N/A
Sound attenuation	N/A
Sound insulation	N/A
Practical sound absorption coefficient (α _p)	
Light reflectance	N/A
Thermal conductivity	N/A
Air permeability	N/A
Humidity	N/A
Green Rating	N/A
Specifications	Supply and install Pelican PS35 Shadowline pre-painted aluminium white Shadowline Wall Trim to perimeter of rooms fixed at 450mm centres with wall anchors.
Notes	<ul style="list-style-type: none"> Pre-drilled @ 450mm centres.

TR03 - PS35 Plaster Trim 35 x 35 - 3D

Scale

TR03 - PS35 Plaster Trim 35 x 35 - Section

Scale 1 : 1



pelican systems

ceiling and partitioning specialists...

Head Office / Durban Branch | 765 / 793 Chris Hani Road, Durban, Redhill | 031 563 7307

Find us online at www.pelican.co.za or any of these social media sites