


Ceiling Insulation Specification

JUMBO Insulation thickness: 50mm/ 100mm/ 135mm

SABS Approved – Permit Number 9486/15037

Specification:

Lay (50mm/100mm/135mm) JUMBO Insulation on the ceiling ensuring that it fits tightly between the tie beams. JUMBO Insulation should be cut 50mm wider than the distance between the tie beams. Cut JUMBO Insulation out around down lights. Cut JUMBO Insulation out around trap doors. Stick the cut section to the back of the trap door using a good quality contact adhesive. Wrap JUMBO Insulation around cold and hot water pipes ensuring that there is 10mm overlap. Secure the JUMBO Insulation using cable ties at 300mm centres.

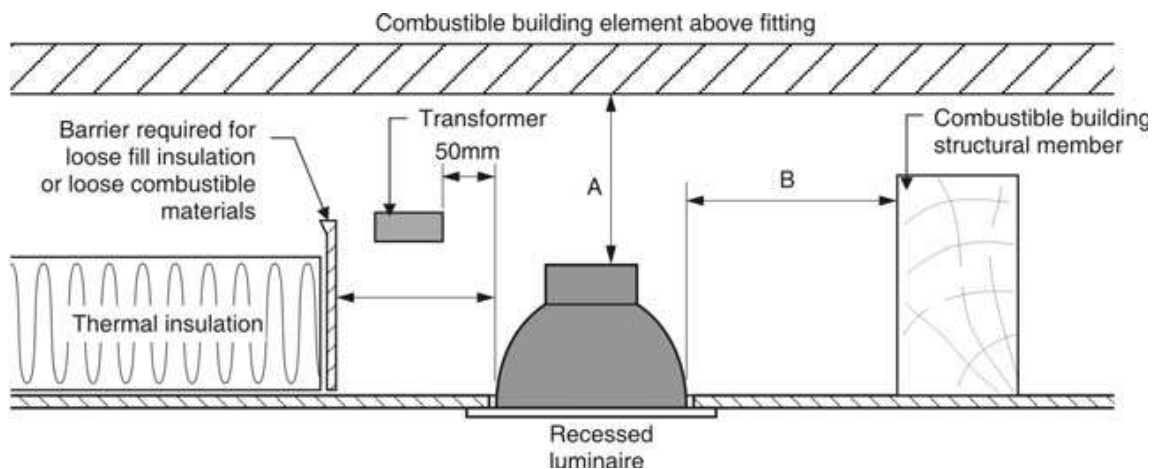





THICKNESS	Dimensions	R Value
50mm	10m x 1.2m x 50mm	1.15
100mm	6m x 1.2m x 100mm	2.20
135mm	5m x 1.2m x 135mm	2.70



KZN Head Office: (031) 563 7307
www.pelican.co.za
info@pelican.co.za

Find this specification on
CCN **AutoSpec**
 Professional
 intelligent specifications



 ceiling systems
  partitioning systems
  opening systems
  flooring systems