Brand: JUMBO Plasterboard & JUMBO Steel Brandering

Board Sizes: 2400/2700/3000/3600mm

Thickness: 7mm

Edge Detail: Square Edge

Suspension System: Steel Brandering (36 x 18 x 0.4mm)


Suspension Bracket: 45 x 150 / 45 x 300

Finish: H-Strip

Spacing: 400mm

Specification:

Fix one layer of 7mm JUMBO Plasterboard to JUMBO Steel Brandering installed at maximum 400mm centres. Fix JUMBO Plasterboard using 25mm JUMBO Drywall Screws at maximum 150mm centres. All joints shall be staggered. Install H-strips and spot the screw heads using JUMBO Jointing Plaster. Ceiling grid consisting of JUMBO Suspension Brackets (150/300mm) fixed to tie beam/joist using 35mm Drywall Course Thread Screws. Install 25 x 25mm Galvanised Steel Angle at ceiling level to the wall. Install JUMBO Steel Brandering onto the suspension brackets. Fix JUMBO Steel Brandering to the galvanised steel angle using 13mm Wafer Tek Screws.

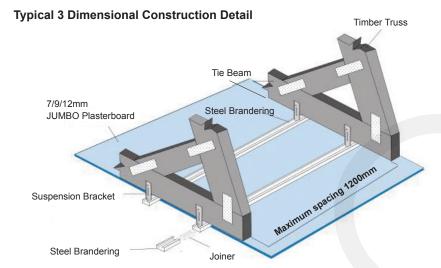

<sup>\*</sup> sections not drawn to scale

