


System:	9mm Flush Plaster Ceiling System
Brand:	JUMBO Plasterboard with JUMBO Steel Brandering
Board Sizes:	2400/2700/3000/3600mm
Thickness:	9mm
Edge Detail:	Tapered Edge
Suspension System:	Steel Brandering (36 x 18 x 0.4mm)
Suspension Bracket:	45 x 150 / 45 x 300
Finish:	Full Skim
Spacing:	400mm
Specification:	<p>Fix one layer of 9mm JUMBO Plasterboard to JUMBO Steel Brandering installed at maximum 400mm centres. Fix JUMBO Plasterboard using 25mm JUMBO Drywall Screws at maximum 150mm centres. All joints shall be staggered. Apply JUMBO Fibre Tape to all joints and skim the ceiling with JUMBO Skimming Plaster. Ceiling grid consisting of JUMBO Suspension Brackets (150/300mm) fixed to tie beam/joist using 35mm JUMBO Drywall Course Thread Screws. Install 25 x 25mm Galvanised Steel Angle at ceiling level to the wall. Install JUMBO Steel Brandering onto the suspension brackets. Fix JUMBO Steel Brandering to the galvanised steel angle using 13mm Wafer Tek Screws.</p>

Typical 3 Dimensional Construction Detail



* sections not drawn to scale

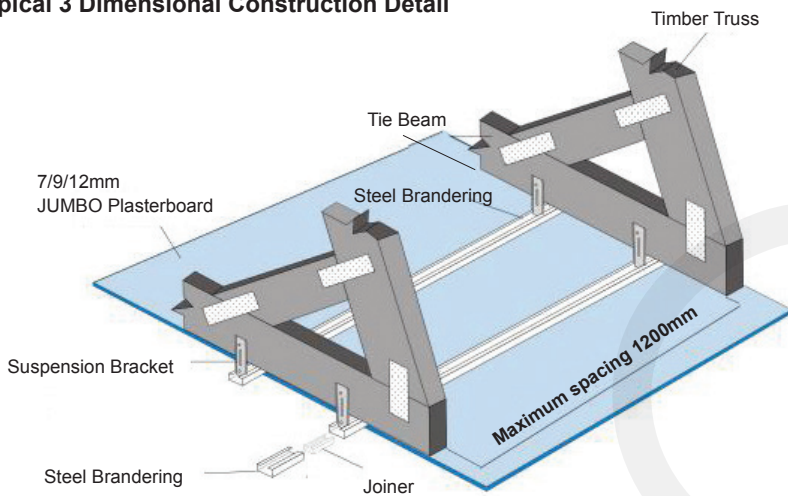