Brand: JUMBO Plasterboard with JUMBO Steel Brandering

Board Sizes: 2400/2700/3000/3600mm

Thickness: 9mm

Edge Detail: Tapered Edge

Suspension System: Steel Brandering (36 x 18 x 0.4mm)


Suspension Bracket: 45 x 150 / 45 x 300

Finish: Tape and Join

Spacing: 400mm

Specification:

Fix one layer of 9mm JUMBO Plasterboard to JUMBO Steel Brandering installed at maximum 400mm centres. Fix JUMBO Plasterboard using 25mm JUMBO Drywall Screws at maximum 150mm centres. All joints shall be staggered. Apply JUMBO Fibre Tape to all joints and cover it with 2 layers of JUMBO Jointing Plaster. Ceiling grid consisting of JUMBO Suspension Brackets (150/300mm) fixed to tie beam/joist using 35mm JUMBO Drywall Course Thread Screws. Install 25 x 25mm Galvanised Steel Angle at ceiling level to the wall. Install JUMBO Steel Brandering onto the suspension brackets. Fix JUMBO Steel Brandering to the galvanised steel angle using 13mm Wafer Tek Screws.

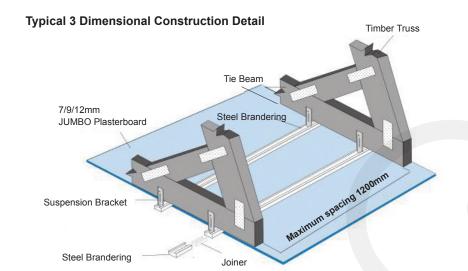

^{*} sections not drawn to scale

