


System:	Pelican Standard 76mm Drywall
Brand:	<b>JUMBO DryWALL 51/30</b>
Thickness:	76mm
Fire Properties:	SANS 10177-2, 30min Fire Rating
Product Detail:	51mm Stud + 52mm Track + 12mm JUMBO Board on each side of stud and track
Acoustic Properties:	36dB
Recommended Areas:	Commercial / Retail / Hospitality / Residential
Specification:	Pelican Systems JUMBO DryWALL 51/30 with overall thickness of 76mm comprising internal framing formed of 51mm galvanised steel studs fixed at 600mm centres to galvanised steel top and bottom track, including any additional steel studding necessary at door openings, glazed or other apertures, abutments, ends, corners, etc and covered with 12mm thick JUMBO Boards in single lengths to suit height, butt jointed and secured to studding with 25mm Drywall Screws at maximum 220mm centres, the joints taped over and flushed over with JUMBO Jointing Plaster compound prepared for painting.

#### Typical Illustration using the JUMBO® 12mm Plasterboard for Drywalling Applications

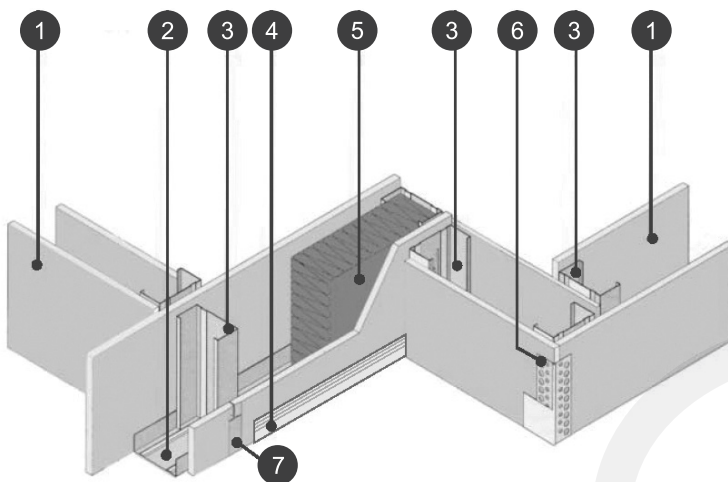

1. JUMBO® 12mm Plasterboard
2. JUMBO® 52mm Track
3. JUMBO® 51mm Stud
4. JUMBO® Skirting
5. JUMBO® 51mm SoundTherm
6. JUMBO® Corner Bead
7. JUMBO® Tape