




System:	Pelican 120 Minute Fire Resistant Drywall
Brand:	JUMBO FireWALL 63/120
Thickness:	124mm
Fire Properties:	SANS 10177-2, 120min Fire Rating
Product Detail:	63mm Stud + 64mm Track + 15mm (x2) JUMBO FR Board on both side of stud and track + 63mm JUMBO SoundTherm
Recommended Areas:	Education / Industrial / Commercial / Residential / Healthcare
Specification:	Pelican Systems JUMBO FireWall 63/120 with overall thickness of 124mm, with 63mm JUMBO Studs at 600mm centres friction fitted into head track and floor track and clad on both sides with a double layer of 15mm thick Fire Resistant JUMBO Board fixed at 200mm centres using 25mm Drywall Screws on the base layer and 41mm Drywall Screws on the face layer, all plasterboard joints to overlap. All exterior joints to be covered with JUMBO Tape and finished with two layers of JUMBO Jointing Plaster applied and lightly sanded down, leaving wall surface prepared for painting, all in accordance with the supplier's recommendations.
Optional:	64mm JUMBO SoundTherm to achieve 56db acoustic rating. Refer to Data Sheet Pelican Acoustic 124mm Drywall.

Typical Illustration using the JUMBO® 15mm Fire Resistant Plasterboard for Drywalling Applications

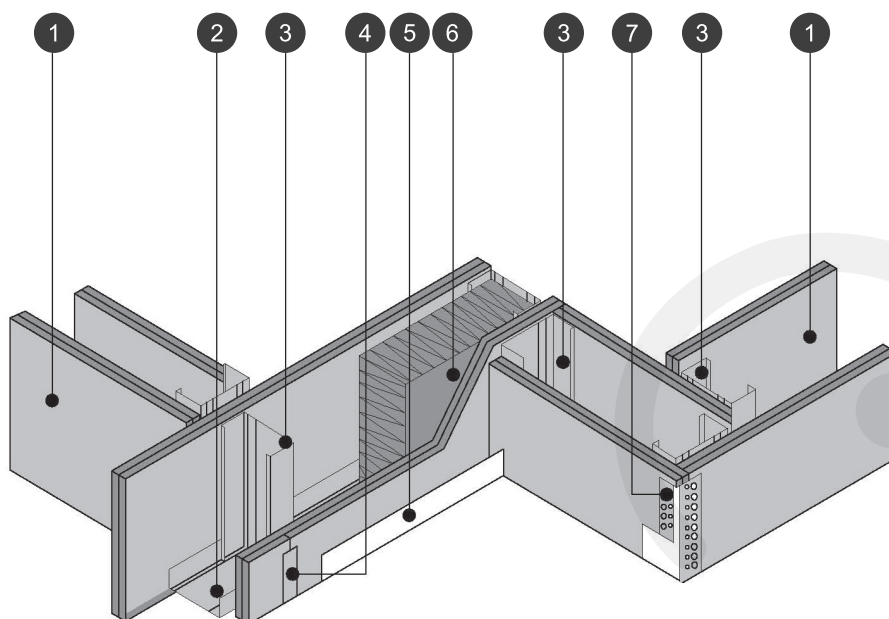

1. JUMBO® 15mm FR Plasterboard
2. JUMBO® 64mm Track
3. JUMBO® 63mm Stud
4. JUMBO® Tape
5. JUMBO® Skirting
6. JUMBO® 63mm SoundTherm
7. JUMBO® Corner Bead