



T1 Toilet partitions framed partition system


The T1 system is constructed from various substrates encased in natural anodized aluminium channels and combined with functional accessories making it an aesthetically pleasing and cost effective alternative to brick construction. The cubicles can be used in public facilities such as washrooms, ablutions and change rooms.

They are available in a wide range of panel patterns and colours which are complemented by the slim aluminium framing.

Flexible and adaptable to any toilet cubicle configuration the T1 System also caters for the requirements of the disabled making this partitioning solution the number one choice for many installations. The T1 System, although modular as standard, can be adapted to various custom configurations and requirements.

Features and Benefits:

- Economical and quick to install
- Neat and hygienic
- Aluminium framed edging and receiving channels
- Standard ironmongery
- Variety of colours and shades in Mellawood or Formica
- Functional and reliable



Anti-theft toilet roll holder


T1 Toilet Cubicle Construction

Infil Panels:

There are two aluminium frame channels available to cater for two different finished thicknesses;

- Lipped Channel accommodates 16mm chipboard with either mellawood or melamine facing.
- Un-lipped Channel accommodates 19mm formica clad chipboard.

The formica clad chipboard is more durable of the two however it is more expensive.



Alluminium hinge with Nylon brushes

Framing:

Intermediate and end partitions, doors and pilasters are neatly framed in 22 x 22mm aluminium lipped channel and mitred at corners.

Skirting:

44mm high aluminium skirtings are formed at the base of pilasters by fixing 22 x 22mm inverted channel to the floor before fixing the pilaster in position, this minimises possible water contact with the base of the pilaster.



Hat and coat hook with Rubber buffer

Transom:


The system is stabilised with the 25mm square aluminium transom.

Junction at Walls:

In order to prevent gaps between uneven tiles, walls and the system, partitions and pilasters are fixed to the walls as follows:

A 26 x 24mm (22 x 22mm I.D.) full height aluminium receiving channel section is fixed vertically to the tiles or plastered brick wall.


The intermediate or end partition / pilaster – all complete with aluminium lipped channel surrounds (22 x 22mm O.D.) are then slotted into the full height receiving channel and fixed plumb.



Inside view

Ironmongery to Doors:

Each door is supplied with a pair of satin finished hinges, indicator bolt and keep and hat and coat hook with rubber buffer which serves as a door stop. The pilaster frame against which the door strikes is fitted with two rubber buffers to prevent unnecessary metal on metal striking noise.



Outside view

Ironmongery to Partitions:

Intermediate and end partitions are supplied with toilet roll holders.

Cleaning Space:


The intermediate and end partitions are fixed 151mm above the finished floor level to allow easy cleaning.

Satin chrome indicator bolt And special keep


Non standard sizes can be made to measure, and door openings can be adapted for wheelchairs etc.




Aluminium Channels

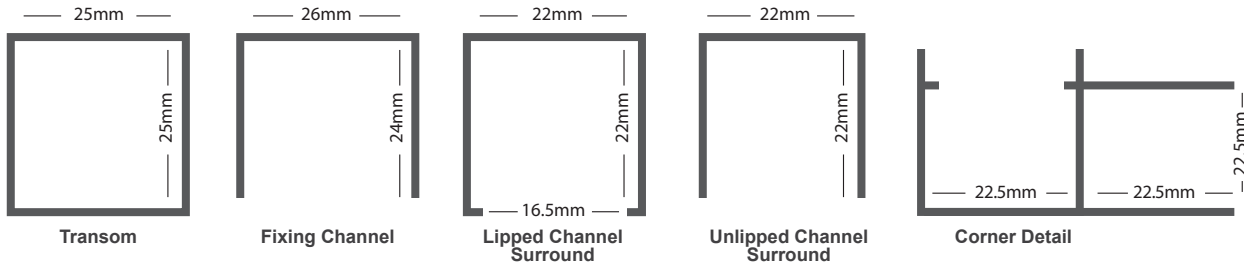



Front Elevation




End Elevation

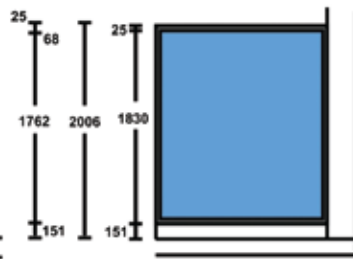

Plan

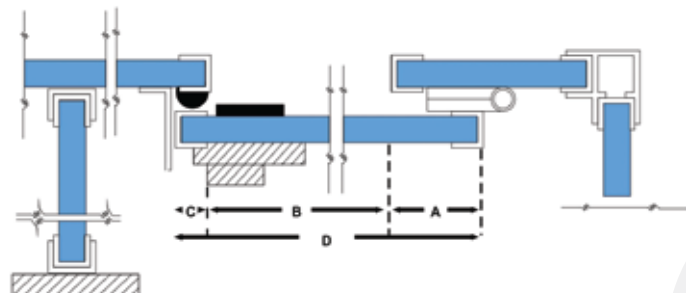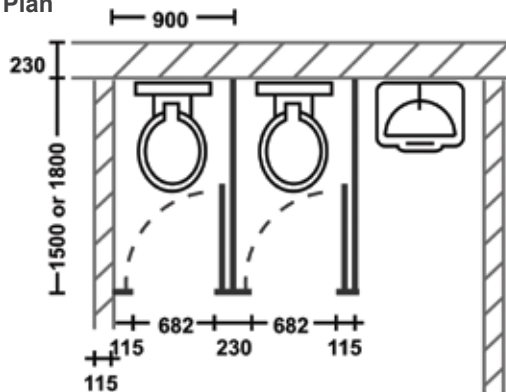

D = Door Size
 C = 22mm (Closing Overlap)
 D = B (varies) + A (58mm) + C (22mm)
 A = 58mm (Hinge Overlap)
 B = Door Opening

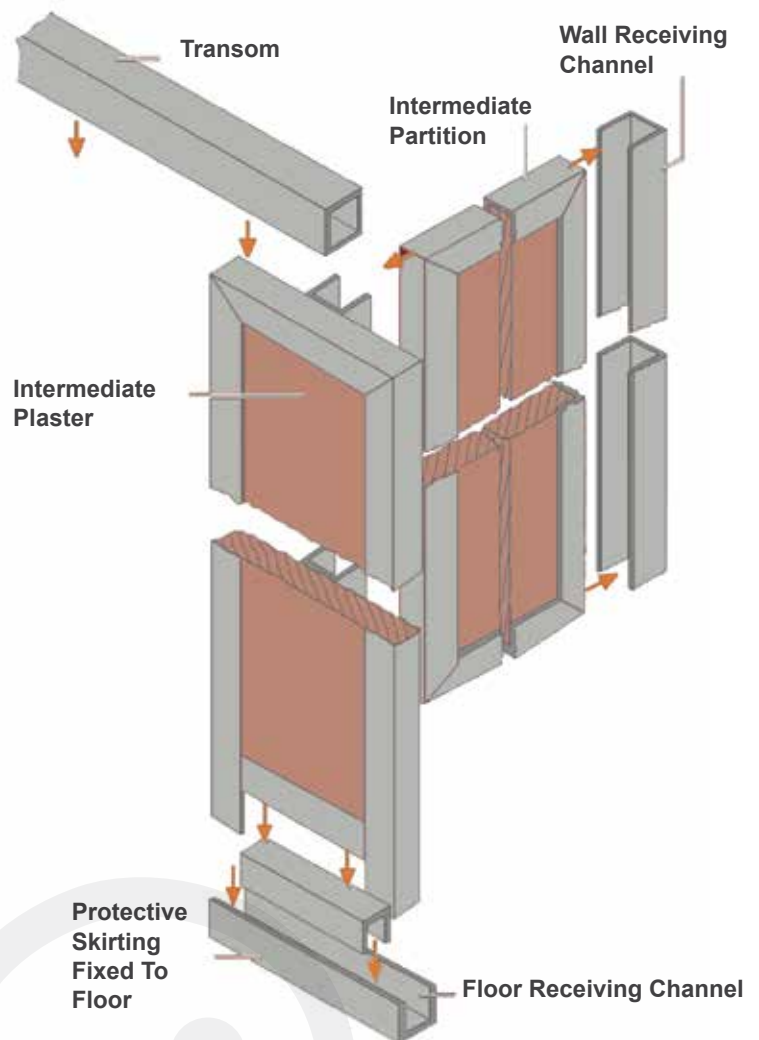

Bill of quantity specification:

Supply and install Pelican Systems T1 Toilet Partition System comprising of 16mm thick particle board panels, laminated both sides with Melawood or Formica (specify colour), edged all round with 22 x 22mm lipped channel and fixed into position by means of full height vertical aluminium receiving channels fixed to the abutting wall, floor or pilaster. Pilasters and end partitions are stabilized by a continuous 25 x 25mm aluminium transom section over doors and supplied with a complete set of standard ironmongery comprising of indicator bolts, hat and coat hooks, door stops, toilet roll holders and rubber buffers. Aluminium surrounds, receiving channels and transom sections shall be (specify colour – natural anodised / colour anodised / colour powder coated).

***Note: Size variations are accommodated by adjusting the width of the doors**