



plasterboard for ceilings

The question of quality versus speed has always been a contentious one in interior design. Economics and demand require buildings to go up quickly and affordably, which can compromise quality. JUMBO® Plasterboard offers an alternative solution for internal walls and can be used for both residential and commercial ceiling applications. JUMBO® Plasterboard is also used to form bulkheads, create curved ceilings, floating ceilings and radiused walls. An extremely versatile product which can accommodate innovative and creative design features, JUMBO® Plasterboard achieves the aesthetic requirements of the design without the necessary drying time for alternate wet trade solutions. All our JUMBO® products are compatible with our ceiling and partition systems.

Features and Benefits

- Quick and easy to install
- Durable, recyclable and versatile
- Light weight



JUMBO® 7mm Plasterboard Square Edge

Recommended for residential ceilings when used in conjunction with our JUMBO® Suspension system (Steel Brandering / JUMBO® Grid) an extremely level ceiling surface can be achieved. Orders and planning are simplified and handling and storage is easier on site as 7mm JUMBO® Plasterboard is stocked in four lengths and one width only.

Sizes	Weight / Board (kg)	Quantity / Pallet	Mass / Pallet (kg)
2400 x 1200 SE	16.40	100	1705
2700 x 1200 SE	18.50	100	1830
3000 x 1200 SE	20.50	100	2075
3600 x 1200 SE	24.60	100	2546

100 per pallet | 5.70 kg/m²

JUMBO® 9mm Plasterboard Tapered Edge

Recommended for commercial ceilings and up-market residential ceilings. Floating ceilings and innovative bulkhead designs can be achieved using the 9mm JUMBO® Plasterboard, JUMBO® Angles and Shadowline Plaster Trims.

Sizes	Weight / Board (kg)	Quantity / Pallet	Mass / Pallet (kg)
2400 x 1200 TE	18.80	80	1582
2700 x 1200 TE	21.20	80	1784
3000 x 1200 TE	23.50	80	2060
3600 x 1200 TE	28.20	80	2378

80 per pallet | 6.53 kg/m²

JUMBO® 12mm Moisture Resistant Plasterboard Tapered Edge

Recommended for both residential and commercial ceiling and drywall applications for wet areas ie: bathrooms and kitchens. 12mm JUMBO® Moisture Resistant Plasterboard is used to form smooth, straight drywalls with sharp edges and when used in conjunction with our drywall systems can provide moisture, impact and acoustic solutions.

Sizes	Weight / Board (kg)	Quantity / Pallet	Mass / Pallet (kg)
2700 x 1200 TE	27.86	70	2213
3000 x 1200 TE	30.96	70	2456

70 per pallet | 8.60 kg/m²



plasterboard for walls

JUMBO® 12mm Plasterboard Tapered Edge

Recommended for both residential and commercial drywall applications. 12mm JUMBO® Plasterboard is exceptionally versatile and lightweight. 12mm JUMBO® Plasterboard used in conjunction with JUMBO® SoundTherm or Galvanised Sheets can provide acoustic and secure solutions. True lines and curved radiused walls are also achievable.

Sizes	Weight / Board (kg)	Quantity / Pallet	Mass / Pallet (kg)
2400 x 1200 TE	23.76	70	1851
2700 x 1200 TE	26.73	70	2101
3000 x 1200 TE	29.70	70	2297
3600 x 1200 TE	35.64	60	2418

70 per pallet | 8.25 kg/m²

JUMBO® 12mm Fire Resistant Plasterboard Tapered Edge

Recommended for both residential and commercial drywall applications for fire protected areas. 12mm JUMBO® Fire Resistant Plasterboard is used to form smooth, straight drywalls with sharp edges and when used in conjunction with our drywall systems can provide impact and acoustic solutions.

Sizes	Weight / Board (kg)	Quantity / Pallet	Mass / Pallet (kg)
2700 x 1200 TE	29.81	70	2089
3000 x 1200 TE	33.12	70	2318
3600 x 1200 TE	39.74	60	2429

70 per pallet | 9.20 kg/m²


JUMBO® 15mm Fire Resistant Plasterboard Tapered Edge

Recommended for both residential and commercial drywall applications for fire protected areas. 15mm JUMBO® Fire Resistant Plasterboard is used to form smooth, straight drywalls with sharp edges and when used in conjunction with our drywall systems can provide impact and acoustic solutions.

Sizes	Weight / Board (kg)	Quantity / Pallet	Mass / Pallet (kg)
2700 x 1200 TE	36.29	50	1903
3000 x 1200 TE	40.32	50	1998
3600 x 1200 TE	59.96	40	3037

50 per pallet | 11.20 kg/m²

Typical Illustration using the JUMBO® 12mm Plasterboard for Drywalling Applications

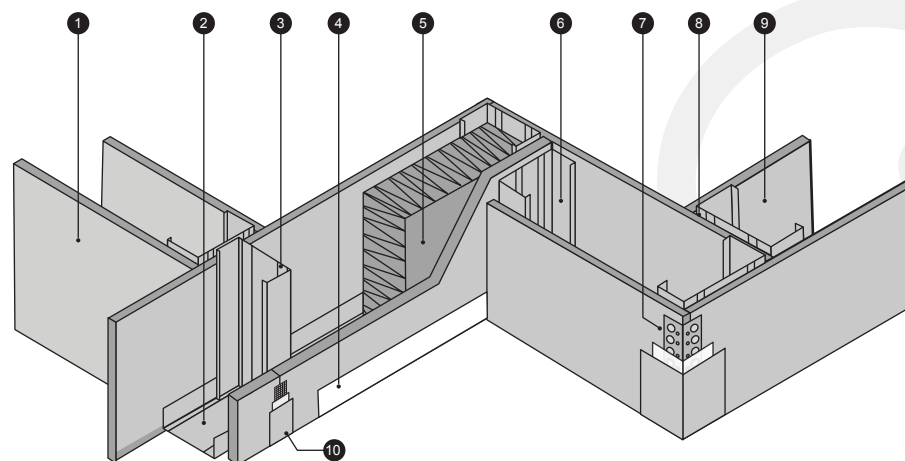

1. JUMBO® 12mm Plasterboard
2. JUMBO® Track
3. JUMBO® Stud
4. JUMBO® Skirting
5. JUMBO® SoundTherm
6. JUMBO® Stud
7. JUMBO® Corner Bead
8. JUMBO® Stud
9. JUMBO® 12mm Plasterboard
10. JUMBO® Tape